



Special Features

- ▲ TAPLANDING DESIGN
- ▲ COMPACT WITH NARROW REACH
- ▲ EASY TO CLEAN AND MAINTAIN
- ▲ SMOOTH NON-POROUS HYGIENIC DESIGN
- ▲ WIDE CHOICE OF COLOURS
- ▲ DECK MOUNTED SIT-ON DESIGN
- ▲ CAN BE SUPPLIED WITH OPTIONAL SENSOR TAPS OR MECHANICAL TAPS

Description

The solid surface nursery wash trough is designed for use by small children or where a compact "narrow reach" is required due to space limitations and offers a modern aesthetically pleasing appearance. The wash trough can be supplied in a choice of standard or special colours with a taplanding (for deck mounted outlets). The solid surface nursery wash trough is designed for deck mounting, or "sit-on" type installation onto a base unit, carcass or vanity unit (by others) and is supplied in a range of standard or special lengths.




Construction

The nursery wash trough is manufactured from a blend of acrylic resin, natural pigments and aluminium hydroxide to give a natural stone appearance. A two stage thermal curing process at high temperature gives the solid surface material superb strength and durability. The coloured wash trough is formed with a centre waste outlet and a taplanding. The wash trough is designed for deck mounting, or "sit-on" type installation onto an existing vanity unit type construction (by others). Available in six standard lengths or special lengths, all solid surface wash troughs are supplied with an unslotted flush grated waste fitting and tap holes as required.

Sizes

Available in standard lengths: 600mm, 1200mm, 1500mm, 1800mm, 2400mm and 3000mm. Special order lengths can be supplied up to 3000mm.

Taps shown are for illustration purposes only

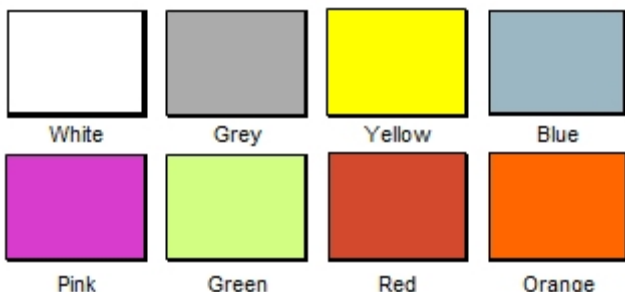

Options

- ▲ Special colours
- ▲ "Non-Touch" sensor taps
- ▲ Mechanical taps
- ▲ Kindergarten taps

Order Codes and Technical Specification

Please refer to the Technical Specification Sheet

Standard colours:
These colours are an indicative guide only as colour rendition varies between screens and printers



Installation and Maintenance Instructions

Apinox Product Code 389 Solid Surface Wash Trough

Installation

ReZina model 389 wash trough is a “sit-on” model designed to be mounted onto a vanity /carcass unit supplied by others

We recommend that the vanity / carcass unit is built with timber struts or similar running from front to back. The number of struts required will depend on the length of the unit being installed and on the construction of the carcass. Enough struts should be provided to ensure adequate support. When positioning a strut to support the centre of the unit, ensure that the strut is sufficiently off-set to avoid the waste fitting.

The underside of the wash trough is bonded to 18mm thick WPB (Water and Boil Proof) plywood.

The trough should be secured by fixing the plywood underside to the struts using wood screws

Caution:

It is important that the length of the wood screws does not exceed the thickness of the struts plus the 18mm thickness of the plywood.

Depending on the installation requirements, some installers may choose to apply “grip-fill” or another similar building adhesive to the back of the trough so as to provide additional strength to the mounting to the wall surface.

After installation the joint between the trough and the wall should be sealed with a waterproof sealant.

Care and Maintenance:

Acorn Powell “ReZina” solid surface wash troughs are easy to clean and maintain. There is a useful Care and Maintenance guide available at our website. Please note that the guidance covers both stainless steel and solid surface products. Please follow this link:

<https://www.acornpowell.co.uk/careandmaintenance>

For Specifiers: Text for use in Specification Documents

SOLID SURFACE WASH TROUGH

Product Code: 389

Description:

ReZina Solid surface nursery wash trough, vanity sit-on with taplanding and centre waste outlet.

Overall Dimensions:

Lengths: 600, 1200, 1500, 1800, 2400 and 3000mm x 325mm wide

Overall height: 142mm

Material:

Solid Surface.

Options:

8 standard colours

Bespoke colours

Supplier:

Acorn Powell Ltd., 5 Brearley Court, Baird Road, Waterwells Business Park, Quedgeley, Gloucester GL2 2AF

Contact details:


Telephone: 01452 721211

Website: www.acornpowell.co.uk

E-mail: sales@acornpowell.co.uk

SOLID SURFACE NURSERY WASH TROUGH DECK MOUNTED

Technical Specification

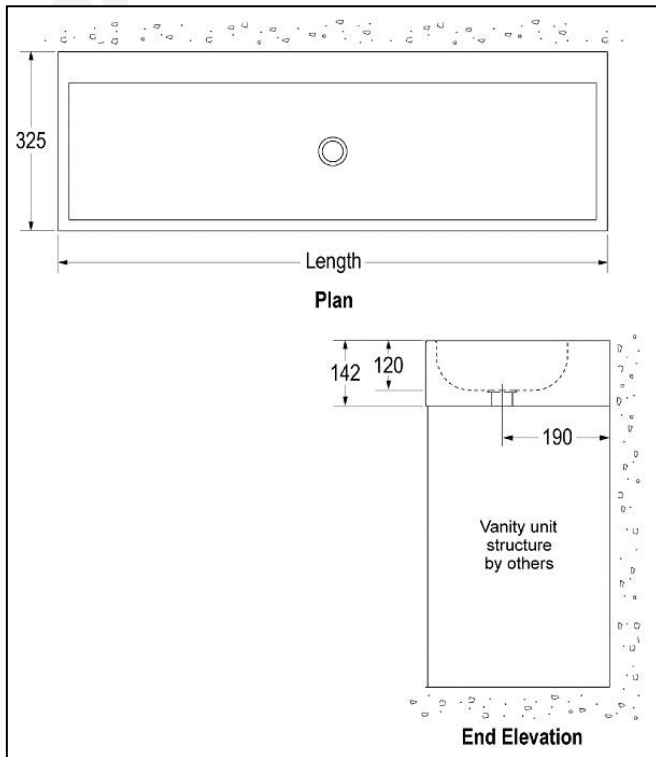

Length

The solid surface nursery wash trough is available in six standard lengths; 600mm, 1200mm, 1500mm, 1800mm, 2400mm and 3000mm. Alternatively any made-to-measure length up to 3000mm can be supplied.

Waste Outlet

The solid surface nursery wash trough is supplied as standard with a 38 mm (1½ inch) BSP unslotted flush grated waste fitting positioned centrally.

Tap Hole Position

The solid surface nursery wash trough is produced with either one central or two tap holes per user.

Tap Hole Sizes

The standard tap hole sizes are 22 mm, 28 mm, 30 mm and 35 mm diameter.

Tap Options

All solid surface wash troughs are available with a selection of mechanical and "no-touch" sensor operated taps and spouts. Please refer to our web site for suitable products.

Soap Dispensing

All solid surface wash troughs are available with a selection of wall or deck mounted mechanical and "no-touch" sensor operated liquid soap dispensers. Please refer to our web site for suitable products.

Product Code Selection for Order or Quotation

1. Base Product Code

389-solid surface deck mounted wash trough, taplanding

2. Length

-600 -1800
-1200 -2400
-1500 -3000 -Other (please specify)

3. Outlet (as facing)

-C-central


4. Tap Hole Size

-22 mm dia -28 mm dia
-30 mm dia -35 mm dia

5. Colour Options (standard colours – others to order)

Trough
-White
-Grey Marta
-Blue
-Yellow
-Green
-Orange
-Pink
-Red

(Other colours please specify _____)

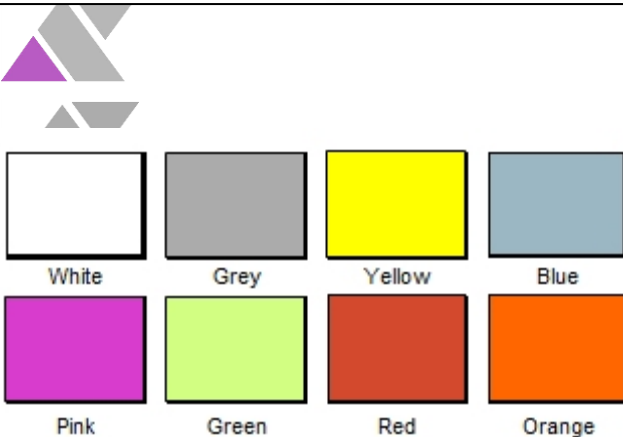

Standard colours shown are indicative and a guide only as colour rendition varies between screens and printers

As improvements in the design and performance of Acorn Powell Limited products is continuous specifications may be subject to change without notification